

ACD-D SERIES



*Impeller with adjustable pitch angle for maximum efficiency fibreglass-reinforced polyamide hub and blades. Aluminum impeller option is also available.

*Resistant to electrostatic powder coated corrosion. Hot dip galvanized steel is available upon request.


*Bird control grille.

*The motor is speed controllable by frequency converter.

*Efficiency class is IE3, 230/400V 50 Hz.

*Usage; suitable for installation in ducts. Suitable for outdoor use.

Technical details;

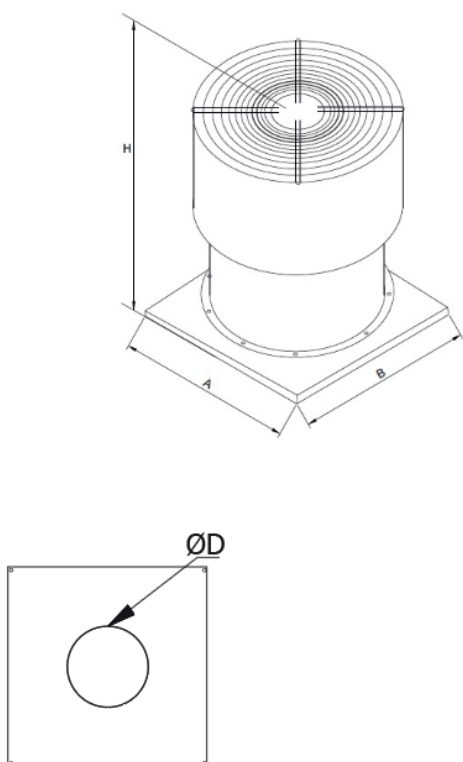

MODELS	DIMENSIONS (mm)			
	A	B	ØD	H
ACD-D 35-2-4T	500	500	355	600
ACD-D 40-2-4T	550	550	400	600
ACD-D 45-2-4T	600	600	450	700
ACD-D 63-2-4T	800	800	630	800
ACD-D 71-2-4T	900	900	710	800
ACD-D 80-2-4T	1000	1000	800	800
ACD-D 90-2-4T	1100	1100	900	900
ACD-D 100-2-4T	1200	1200	1000	900
ACD-D 112-2-4T	1400	1400	1120	900
ACD-D 125-2-4T	1450	1450	1250	900

MODEL	PRODUCT CODE	AIRFLOW (m ³ /h)	POWER (KW)	SOUND (dBA)	CURRENT (AMP)	ROTATION (RPM)	VOLTAGE (V)	WEIGHT (KG)
ACD-D 35-2T-0,37	32201	4906	0,37	88	1,05	2850	380	68
ACD-D 35-2T-0,55	32202	6048	0,55	91	1,21	2780	380	69
ACD-D 35-2T-0,75	32203	6810	0,75	94	1,60	2880	380	70
ACD-D 35-2T-1,1	32204	7863	1,10	92	2,30	2900	380	70
ACD-D 40-2T-1,1	32205	9767	1,10	97	2,30	2900	380	79
ACD-D 71-2-4T	32206	10652	1,50	96	3,30	2900	380	80
ACD-D 45-2T-1,5	32207	12432	1,50	97	3,30	2900	380	91
ACD-D 45-2T-2,2	32208	15232	2,20	99	4,45	2900	380	97
ACD-D 63-2T-1,5	32209	16464	1,50	106	3,30	2900	380	144
ACD-D 63-2T-2,2	32210	20272	2,20	102	4,45	2900	380	144
ACD-D 63-2T-3	32211	22512	3,00	101	5,80	2900	380	149
ACD-D 63-2T-4	32212	25760	4,00	101	7,40	2920	380	155
ACD-D 63-2T-5,5	32213	30128	5,50	102	9,70	2925	380	157
ACD-D 63-2T-7,5	32214	34384	7,50	105	12,90	2930	380	160
ACD-D 63-2T-7,5/H	32215	29344	7,50	105	12,90	2930	380	160
ACD-D 71-2T-5,5	32216	34944	5,50	104	9,70	2925	380	184
ACD-D 71-2T-7,5	32217	41104	7,50	105	12,90	2930	380	188
ACD-D 71-2T-11	32218	47824	11,00	106	19,00	2955	380	198
ACD-D 71-2T-11/H	32219	38864	11,00	113	19,00	2955	380	198
ACD-D 71-2T-15	32220	47488	15,00	109	25,70	2955	380	204
ACD-D 80-2T-7,5	32221	44240	7,50	110	12,90	2930	380	208
ACD-D 80-2T-11	32222	54320	11,00	111	19,00	2955	380	218
ACD-D 80-2T-15	32223	51744	15,00	112	25,70	2955	380	223
ACD-D 80-2T-18,5	32224	58800	18,50	114	31,40	2960	380	228
ACD-D 80-2T-22	32225	64064	22,00	115	36,90	2960	380	261
ACD-D 80-2T-22/H	32226	47936	22,00	115	36,90	2960	380	261
ACD-D 63-4T-0,75	32227	15904	0,75	88	1,70	1445	380	132
ACD-D 63-4T-1,1	32228	18144	1,10	89	2,60	1447	380	135
ACD-D 63-4T-1,5	32229	18704	1,50	91	3,50	1449	380	137
ACD-D 63-4T-2,2	32230	23184	2,20	95	4,90	1443	380	140
ACD-D 71-4T-2,2	32231	26880	2,20	94	4,90	1443	380	174
ACD-D 71-4T-3	32232	30576	3,00	95	6,20	1446	380	180
ACD-D 71-4T-4	32233	34272	4,00	98	8,20	1452	380	186
ACD-D 80-4T-3	32234	36064	3,00	97	6,20	1446	380	198
ACD-D 80-4T-4	32235	40992	4,00	98	8,20	1452	380	203
ACD-D 80-4T-5,5	32236	44128	5,50	101	10,60	1467	380	213
ACD-D 80-4T-7,5	32237	46032	7,50	100	15,20	1467	380	228
ACD-D 90-4T-3	32238	39424	3,00	102	6,60	1446	380	224
ACD-D 90-4T-4	32239	46368	4,00	101	8,20	1452	380	229
ACD-D 90-4T-5,5	32240	50064	5,50	101	11,20	1467	380	239
ACD-D 90-4T-7,5	32241	57120	7,50	102	15,40	1467	380	264
ACD-D 100-4T-4	32242	53872	4,00	103	8,20	1452	380	255
ACD-D 100-4T-5,5	32243	52976	5,50	108	11,20	1467	380	260
ACD-D 100-4T-7,5	32244	63504	7,50	107	15,40	1467	380	285
ACD-D 100-4T-11	32245	75376	11,00	109	21,00	1470	380	318
ACD-D 100-4T-11/H	32246	61152	11,00	107	21,00	1470	380	318
ACD-D 112-4T-5,5	32247	66528	5,50	105	11,20	1467	380	288
ACD-D 112-4T-7,5	32248	75040	7,50	105	15,40	1467	380	308
ACD-D 112-4T-11	32249	82320	11,00	107	21,00	1470	380	353
ACD-D 112-4T-15	32250	89936	15,00	109	30,90	1477	380	363
ACD-D 125-4T-11	32251	90944	11,00	113	21,00	1470	380	372
ACD-D 125-4T-15	32252	105840	15,00	113	30,90	1477	380	385
ACD-D 125-4T-15/H	32253	83440	15,00	119	30,90	1477	380	385
ACD-D 125-4T-18,5	32254	113120	18,50	112	39,50	1474	380	405
ACD-D 125-4T-22	32255	124320	22,00	111	41,60	1485	380	425
ACD-D 125-4T-22/H	32256	102480	22,00	117	41,60	1485	380	425
ACD-D 125-4T-30	32257	137760	30,00	114	54,80	1475	380	485
ACD-D 125-4T-30/H	32258	123200	30,00	117	54,80	1475	380	485
ACD-D 125-4T-37	32259	138880	37,00	113	68,60	1475	380	515
ACD-D 125-4T-37/H	32260	119840	37,00	116	68,60	1475	380	515
ACD-D 125-4T-45	32261	150080	45,00	114	80,00	1475	380	620
ACD-D 125-4T-45/H	32262	136640	45,00	116	67,00	1475	380	620
ACD-D 125-4T-55	32263	168000	55,00	116	96,00	1480	380	715
ACD-D 125-4T-55/H	32264	153440	55,00	115	96,00	1480	380	715