




HRP SERIES

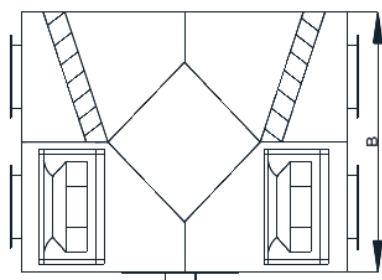

- * It has a high-efficiency impeller structure with a backward-curved plug fan.
- * Aluminum crossflow plate heat exchanger is used for heat recovery.
- * G4 filter is included in standard production.
- * EC motor option is available.
- * There is a 6-step heat control on the panel.
- * Optional electric heater is available.
- * Compatible with Modbus.
- * There are 3-step settings on the panel for the electric heater.

Technical Details;

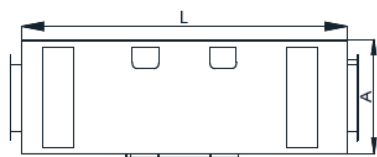

MODELS	DIMENSIONS (mm)						
	A	B	C	C1	D	D1	L
HRP 190	400	800	250	275	250	275	1000
HRP 225	400	800	250	275	250	275	1000
HRP 250	400	800	250	275	250	275	1000
HRP 280	400	800	250	275	250	275	1000
HRP 355	550	1000	300	325	300	325	1500
HRP 400	550	1100	300	325	300	325	1650
HRP 450	600	1100	400	425	400	425	1650
HRP 500	600	1200	450	475	450	475	1750

MODELS	PRODUCT CODE	AIRFLOW (m ³ /h)	POWER (W)	SOUND (dBA)	CURRENT (AMP)	ROTATION (RPM)	VOLTAGE (V)	WEIGHT (KG)
HRP 190	83001	400	61*2	65	0,3*2	2700	230	60
HRP 225	83002	750	155*2	73	0,7*2	2700	230	75
HRP 250	83003	1000	208*2	73	0,9*2	2700	230	80
HRP 280	83004	2000	345*2	81	1,5*2	2700	230	85
HRP 355	83005	2350	205*2	75	0,9*2	1400	230	105
HRP 400	83006	3000	500*2	69	1,8*2	1380	230	145
HRP 450	83007	4150	550*2	69	2,5*2	1320	230	160
HRP 500	83008	6500	1550*2	80	6,8*2	1380	230	180

HEAT RECOVERY UNIT CONTROL PANEL

