


RADIAL SNAIL FAN

RKD-S SERIES



Technical details;

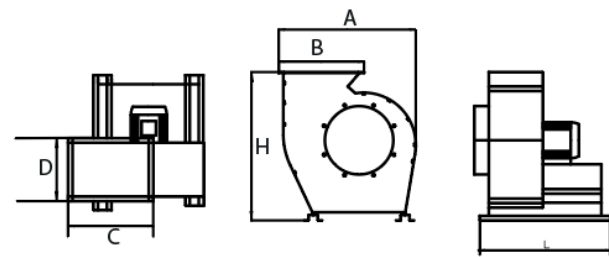

- *The product is of the snail type.
- *It has a backward-curved, wide-bladed radial type impeller structure.
- *The product 380 V and suitable for operation with a frequency inverter.
- *It is suitable for outdoor use.
- *It has a low noise level.
- *The motor protection class is IP 55.

MODELS	DIMENSIONS (mm)					
	A	B	C	D	L	H
RKD-S 315-4T-0,25	696	187	270	373	767	713
RKD-S 355-4T-0,37	771	208	307	412	846	689
RKD-S 355-4T-0,55	771	208	307	412	846	689
RKD-S 400-4T-0,75	850	231	334	457	927	827
RKD-S 450-4T-1,5	940	256	370	510	1023	913
RKD-S 500-4T-2,2	1024	281	406	559	1127	913
RKD-S 560-4T-3	1127	317	449	618	1231	942
RKD-S 630-4T-5,5	1241	343	505	683	1349	998
RKD-S 710-4T-7,5	1382	380	550	758	1052	1172
RKD-S 710-4T-11	1432	380	550	758	1052	1172
RKD-S 800-4T-15	1516	419	606	837	1627	1311
RKD-S 315-2T-1,1	696	187	270	373	767	713
RKD-S 355-2T-2,2	771	208	301	412	846	744
RKD-S 400-2T-4	850	231	334	457	927	777
RKD-S 450-2T-5,5	940	256	370	510	1023	863
RKD-S 500-2T-11	1024	281	406	559	1127	849

MODEL	PRODUCT CODE	AIRFLOW (m ³ /h)	POWER (KW)	SOUND (dBA)	CURRENT (AMP)	ROTATION (RPM)	VOLTAGE (V)	WEIGHT (KG)
RKD-S 315-4T-0,25	45001	4500	1,10	96	2,3	2900	380	57
RKD-S 355-4T-0,37	45002	6980	2,20	97	4,5	2900	380	66
RKD-S 355-4T-0,55	45003	9800	4,00	100	7,9	2920	380	82
RKD-S 400-4T-0,75	45004	13800	7,50	98	13,6	2925	380	126
RKD-S 450-4T-1,5	45005	2450	0,37	82	1,2	1390	380	54
RKD-S 500-4T-2,2	45006	3650	0,37	81	1,2	1390	380	58
RKD-S 560-4T-3	45007	4550	0,55	84	1,6	1385	380	67
RKD-S 630-4T-5,5	45008	6600	0,75	82	1,7	1445	380	93
RKD-S 710-4T-7,5	45009	9180	1,50	86	3,5	1449	380	109
RKD-S 710-4T-11	45010	13300	3,00	95	6,2	1446	380	129
RKD-S 800-4T-15	45011	18000	5,50	98	10,6	1467	380	155
RKD-S 315-2T-1,1	45012	27200	7,50	102	15,2	1467	380	189
RKD-S 355-2T-2,2	45013	28150	11,00	101	21,0	1470	380	189
RKD-S 400-2T-4	45014	37900	15,00	102	30,9	1477	380	276
RKD-S 450-2T-5,5	45015	39350	18,50	103	39,5	1474	380	316
RKD-S 500-2T-11	45016	52300	22,00	105	41,6	1475	380	360