



SHELTER FRESH AIR FAN

RKS SERIES

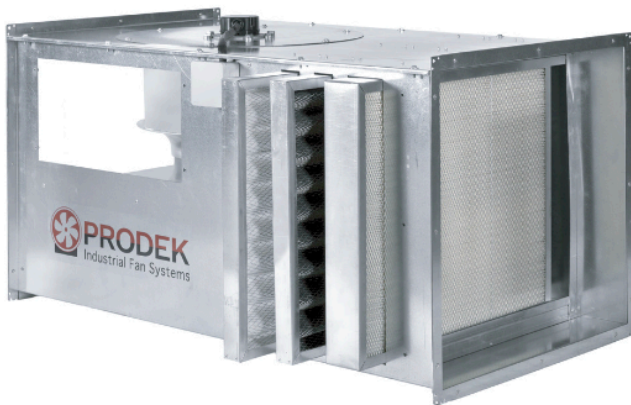

- *The case is made of self-supporting galvanized sheet metal frame construction with high impact resistant .
- * Fan casing is made of galvanized steel.
- *Impellers with backward curved impeller blades made of galvanized steel are powered by means of the 2-or 4-pole asynchronous motors with external rotor.
- * G4 + HEPA + ACTIVATED CARBON filters standart included, optional filter can be use.
- * Each impeller is dynamically balanced while assembly.
- *Motor protection rating IP 44
- *Optional single phase 230 V/50 hz and three-phase 230/400V-50Hz.

Technical details;

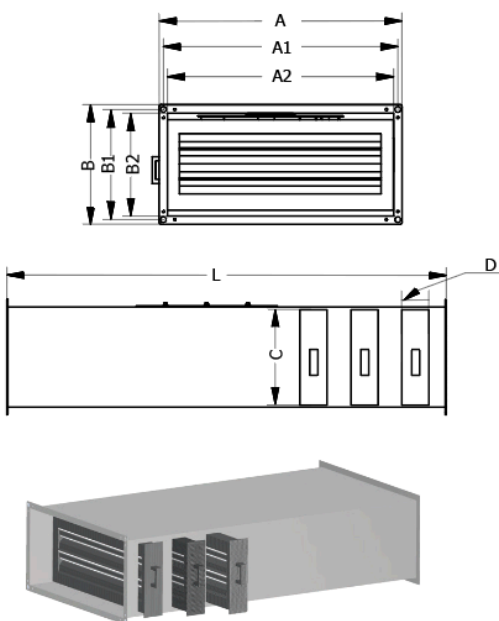

MODELS	DIMENSION (mm)								
	A	A1	A2	B	B1	B2	L	C	D
RKS 190	450	425	400	300	275	250	950	395	195
RKS 225	500	475	450	300	275	250	950	445	195
RKS 250	500	475	450	350	325	300	1000	445	245
RKS 280	500	475	450	350	325	300	1000	445	245
RKS 355	550	525	500	350	325	300	1100	495	245
RKS 400	650	625	600	400	375	350	1200	595	295
RKS 450	700	675	650	450	425	400	1300	645	345
RKS 500	850	825	800	650	625	600	1300	795	545
RKS 560	950	925	900	700	675	650	1400	895	595

MODEL	PRODUCT CODE	AIRFLOW (m ³ /h)	POWER (W)	SOUND (dBA)	CURRENT (AMP)	ROTATION (RPM)	VOLTAGE (V)	WEIGHT (KG)
RKS 190	44001	550	61	52	0.30	2700	230	25
RKS 225	44002	1350	155	54	0.70	2700	230	27
RKS 250	44003	1550	208	54	0.90	2700	230	31
RKS 280	44004	2330	345	55	1.50	2700	230	32
RKS 355	44005	2850	205	55	0.90	1400	230	55
RKS 400	44006	4120	500	60	1.80	1380	230	61
RKS 450	44007	5800	550	62	2.50	1320	230	77
RKS 500	44008	7500	1550	64	6.80	1380	230	116
RKS 560	44009	10800	1850	66	3.60	1200	380	138