



BOX TYPE RADIAL SMOKE EXHAUST FAN

RSD SERIES

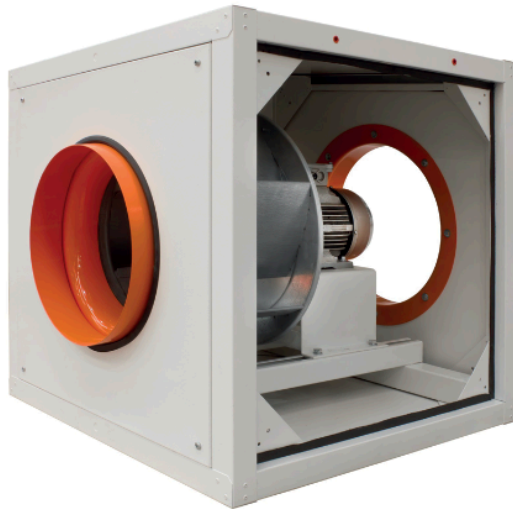

- * Backward curved radial impeller structure.
- * Cell panels are made of single walled galvanized steel.
- * Resistant to electrostatic powder coated corrosion.
- * The motor is speed controllable by frequency converter.
- * Efficiency class is IE3.
- * Suitable for operating temperatures of up to 400°C /2h.
- * Optional double speed F400/2h, F300/2h and double speed.

Technical Details;

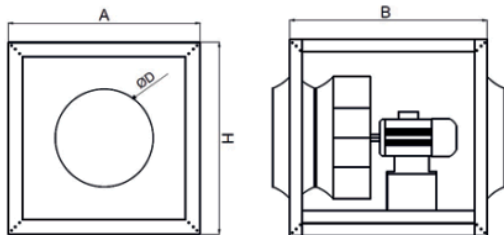

MODELS	DIMENSIONS (mm)			
	ØD	A	B	H
RSD 400-4T-0,55-F400	240	700	700	700
RSD 450-4T-0,75-F400	260	750	750	750
RSD 500-4T-1,5-F400	310	800	800	800
RSD 560-4T-3-F400	340	925	925	925
RSD 630-4T-5,5-F400	410	1000	1000	1000
RSD 710-4T-7,5-F400	460	1050	1050	1050
RSD 710-4T-11-F400	460	1050	1050	1050
RSD 315-2T-1,1-F400	190	650	650	650
RSD 355-2T-2,2-F400	190	650	650	650
RSD 400-2T-4-F400	240	700	700	700
RSD 450-2T-7,5-F400	260	750	750	750

MODEL	PRODUCT CODE	AIRFLOW (m³/h)	POWER (KW)	SOUND (dBA)	CURRENT (AMP)	ROTATION (RPM)	VOLTAGE (V)	WEIGHT (KG)
RSD 400-4T-0,55-F400	65001	4600	0,55	88	1.5	1385	380	95
RSD 450-4T-0,75-F400	65002	6600	0,75	89	2.1	1410	380	100
RSD 500-4T-1,5-F400	65003	8700	1,5	92	3.5	1430	380	110
RSD 560-4T-3-F400	65004	13280	3	90	6.6	1435	380	140
RSD 630-4T-5,5-F400	65005	17600	5,5	74	11.2	1465	380	180
RSD 710-4T-7,5-F400	65006	27500	7,5	73	15.4	1465	380	210
RSD 710-4T-11-F400	65007	25000	11	76	21	1470	380	250
RSD 315-2T-1,1-F400	65008	4500	1,1	74	2.3	2900	380	70
RSD 355-2T-2,2-F400	65009	6500	2,2	78	4.5	2900	380	85
RSD 400-2T-4-F400	65010	9400	4	87	7.4	2920	380	120
RSD 450-2T-7,5-F400	65011	13300	7,5	90	12.9	2930	380	135